


0.196/0.200 DIA. THRU
8 PLACES

FLANGE CPRG (INPUT SIDE)

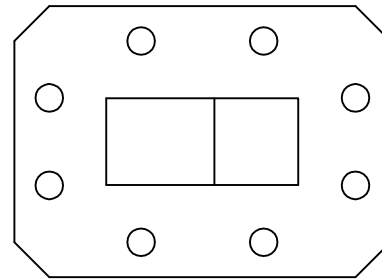

FLANGE CPRF

TABLE 1

G#	ATTEN.
1	3.5 DB
2	6.0 DB
3	1.0 DB
4	2.0 DB
5	3.0 DB
6	8.0 DB
7	4.0 DB

SPECIFICATIONS

- 1- FREQUENCY 5.850-6.425 GHZ
- 2- ATTENUATION PER TABLE 1 +/- 0.5 dB
- 3- ATTENUATION SLOPE +/-0.4 dB MAX.
- 4- VSWR 1.25:1 MAX.
- 5- POWER HANDLING 5 WATTS MAX.
- 6- PRESSURIZATION 10 PSIG
- 7- ENVIRONMENT OUTDOORS
- 8- TEMPERATURE -40 TO 60 DEGREES C
- 9- FINISH
 - A- CHROMATE PER MIL-C-5541 CLASS 3
 - B- MASK FLANGE FACES AND HOLES
 - C- PAINT WITH WHITE EPOXY PAINT

MICROWAVE COMPONENTS & SYSTEMS
583 BERLIN ROAD, MARLBORO MA

ATTENUATOR
WR 137

	SIZE B	DRAWING NO. 2105-0000	REV C
--	------------------	---------------------------------	-----------------

FILE ATTENUATOR1

SHEET: 1 OF 1