


REVISIONS			
SYM	DESCRIPTION	DATE	APPD
-	RELEASED	8/21/09	KL
A	REVISED	12/15/09	KL

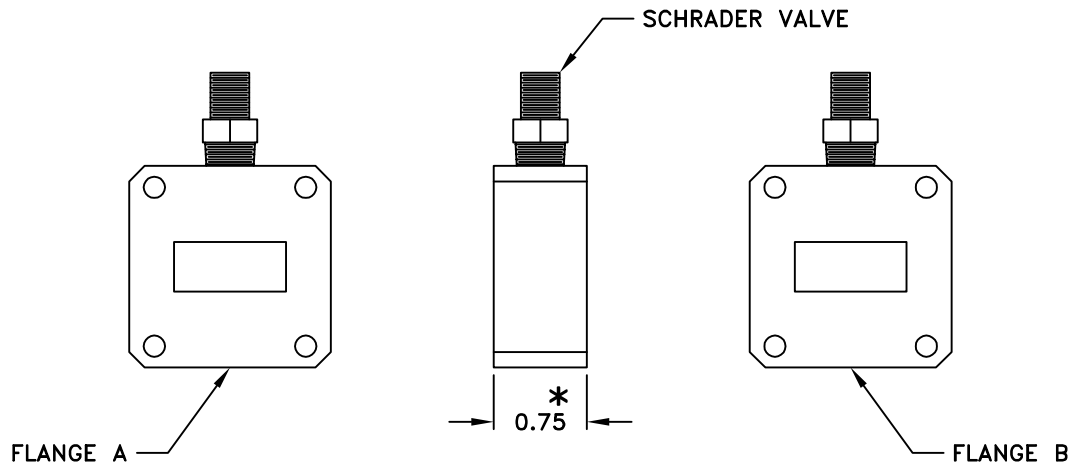

SPECIFICATIONS:

ELECTRICAL

FREQUENCY -- PER TABLE

VSWR -- 1.05 MAX

INSERTION LOSS -- 0.05 dB MAX

MATERIAL -- ALUMINUM

FINISH -- YELLOW CHROMATE

WAVEGUIDE -- PER TABLE

FLANGE -- PER TABLE

PART #	WR-	FREQ (GHz)
3113-1	62	12.4 TO 18.0
3113-2	75	10.0 TO 15.0
3113-3	90	8.2 TO 12.4
3113-4	112	7.05 TO 10.0
3113-5	137	5.85 TO 8.2
3113-6	159	4.9 TO 7.05
3113-7	187	3.95 TO 5.85
3113-8	229	3.3 TO 4.9
3113-9	284	2.6 TO 3.95
3113-10	340	2.1 TO 3.0
3113-11	430	1.7 TO 2.6

FLANGE

- 1 - COVER
- * 2 - CHOKE
- 3 - CPRF
- 4 - CPRG
- 5 - CMR
- 6 - UBR

PART NUMBER EXAMPLE

3113-1-33



* CONSULT FACTORY
FOR THICKNESS
WHEN CHOKE
FLANGES
ARE REQUIRED

Microwave Components and Systems Inc
80 Lyman Street, Northborough MA 01532

TITLE

PRESSURE INLET

CODE IDENT NO.	SIZE	PART NO.	REV
1N0P6	B	SEE TABLE	A
FILE: PRESSURE 2	WT: --/--	SHEET: 1 OF 1	